

VT-4A

UL Approval: E214381 Version: B6

Aluminum Base Laminate/Prepreg

General Information

- > VT-4A1 /VT-4A1 PP: Thermal Conductivity - 1.6W/mK, MOT 90°C
- > VT-4A2 /VT-4A2 PP: Thermal Conductivity - 2.2W/mK, MOT 90°C
- > VT-4A2H /VT-4A2H PP: Thermal Conductivity - 2.2W/mK, MOT 105°C
- > Excellent Electrical and Mechanical Characteristics
- > Flammability UL94 V0
- > Halogen Free

Application

- > Ultra bright LED Substrate
- > Power Conversion
- > PDP, LED, Regulator for TV
- > Monitor Drives
- > Rectifier, Power Supply



Storage Condition & Shelf Life

		Prepreg		Laminate
Storage Condition	Temperature	< 23°C (73°F)	< 5°C (41°F)	Room
	Relative Humidity	< 55%	/	/
Shelf Life		3 Months	6 Months	24 months

The RCC & RCF exceeding shelf life should be retested.

Designation of IMS Laminate

VT-4AX 1.0mm Alu (5052) .003" Dielectric 1oz Cu

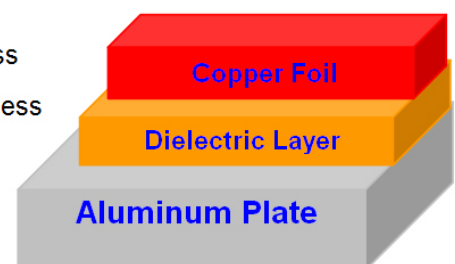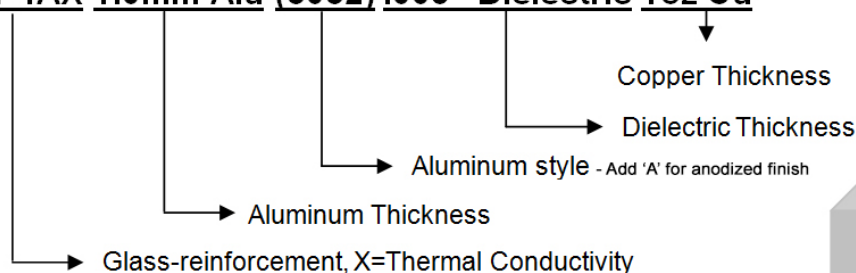

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre,
Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
21 Water Street, Amesbury,
Massachusetts, MA 01913,
United States of America
T: +1 978-5219700
Email: saleseast@ventec-usa.com

www.ventecclaminates.com



VT-4A

UL Approval: E214381 Version: B6

Aluminum Base Laminate/Prepreg

Laminate Properties

Item		Test Method (IPC-TM-650)	Unit	VT-4A1				VT-4A2				VT-4A2H			
				75um	100um	125um	150um	75um	100um	125um	150um	75um	100um	125um	150um
Thermal Conductivity		ISO 22007-2	W/m*K	1.6				2.2				2.2			
Thermal Impedance		ISO 22007-2	°C*in ² /W	0.074	0.099	0.123	0.148	0.054	0.072	0.089	0.107	0.054	0.072	0.089	0.107
Tg	DSC	2.4.25	°C	130				130				130			
Td	TGA	ASTM D3850	°C	380				380				380			
Thermal Stress	Solder Dip @ 288°C	2.4.13.1	Minute	≥5				≥5				≥5			
Hi-Pot Withstand	DC	2.5.7.2	V	4500	5000	6000	8000	4500	5000	6000	8000	4500	5000	6000	8000
Breakdown Voltage	AC	2.5.6.3	V	6000	7500	9000	10000	6000	7500	9000	10000	6000	7500	9000	10000
Dk @ 1MHz	C-24 / 23 / 50	2.5.5.3	—	5.0				5.1				5.1			
Df @ 1MHz	C-24 / 23 / 50	2.5.5.3	—	0.015				0.014				0.014			
Volume Resistance	After Moisture	2.5.17.1	MΩ-cm	4.5E+8				5.1E+8				5.1E+8			
	E-24/125			2.3E+7				3.1E+7				3.1E+7			
Surface Resistance	After Moisture	2.5.17.1	MΩ	2.2E+7				2.3E+7				2.3E+7			
	E-24/125			5.1E+6				5.2E+6				5.2E+6			
Peel strength (1oz)	As received	2.4.8	Lb/in	12				12				12			
CTI	As received	ASTM D3638	V	600				600				600			
Flammability	As received	UL 94	Rating	V0				V0				V0			
RTI	Electric	UL 94	°C	90				90				105			
	Mechanical	UL 94	°C	90				90				105			

All test data provided are typical values and not intended to be specification values.

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre,
Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
21 Water Street, Amesbury,
Massachusetts, MA 01913,
United States of America
T: +1 978-5219700
Email: saleseast@ventec-usa.com

www.ventec laminates.com



VT-4A

UL Approval: E214381 Version: B6

Aluminum Base Laminate/Prepreg

Availability

Laminate

Item		Availability
Dielectric		.003"(75um), .004"(100um), .005"(125um), .006"(150um), .008"(200um)
Standard Size	Imperial	18*24, 20*24, 21*24, 18*48, 20*48, 21*48
	Metric	457*610, 508*610, 533*610, 457*1220, 508*1220, 533*1220
Copper Weight		Hoz, 1oz, 2oz, 3oz, 4oz, 6oz, 10oz
Aluminum Thickness		0.6mm, 0.8mm, 1.0mm, 1.2mm, 1.5mm, 2.0mm, 3.0mm
Aluminum Alloy		1100, 5052, or as required

Prepreg

Product	Pressed Thickness (um)	Glass Fabric	Application
VT-4A1	75	106	Circuit Clearance Fill
VT-4A2	100	106	Circuit Clearance Fill
	125	106	Hole Fill
VT-4A2H	125	106	Hole Fill
	125	106	Hole Fill

Protective Film for Aluminium Plate

Type	Material	Max Operation Temperature
Standard	PET	170 °C
High Temperature	Polyimide	270 °C

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
308 TaiShan Rd,
New District Suzhou,
Jiangsu, P.R. China 215129
T: +86 512-68091810
Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
Unit 1 Trojan Business Centre,
Tachbrook Park Estate,
Leamington-Spa, CV34 6RH, UK
T: +44 1926-889822
Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
21 Water Street, Amesbury,
Massachusetts, MA 01913,
United States of America
T: +1 978-5219700
Email: saleseast@ventec-usa.com

www.ventec laminates.com

VT-4A

UL Approval: E214381 Version: B6

Aluminum Base Laminate/Prepreg

Aluminum and Aluminum Alloy Information

Major Chemical Composition

Alloy Code	Composition	Alloy Code	Composition
1100	Al, Si, Fe, Cu, Zn, Mn	5052	Al, Mg, Fe, Si, Cr, Cu, Zn
3003	Al, Mn, Si, Fe, Cu, Zn	6061	Al, Mg, Si, Fe, Cr, Cu, Zn, Ti, Mn

Calorific & Electrical Performance

Alloy	Melting Point Range [°C]	CTE (ppm/°C)		Cp (J/g-°C)	Thermal Conductivity (W/m-K)	Resistivity (Ω-cm)
		20~100°C	20~300°C			
1100	643~657.2	23.6	25.5	0.904	220	3.00E-6
3003	643~654	23.2	25.1	0.893	163	4.16E-6
5052	607.2~649	23.8	25.7	0.880	138	4.99E-6
6061	582~651.7	23.6	25.3	0.896	167	3.99E-6

Mechanical Performance

Alloy	Hardness (HB)	Ultimate Tensile Strength (MPa)	Tensile Yield Strength (MPa)	Elongation at Break 1.6mm (%)	Elastic Modulus (GPa)	Poisson Ratio	Fatigue Strength (MPa)	Shear Modulus (GPa)	Shear Strength (MPa)
1100H24	32	124	117	9	68.9	0.330	48.3	26.0	75.8
3003H24	40	152	145	8	68.9	0.330	62.1	25.0	96.5
5052H32	68	262	214	10	70.3	0.330	124	25.9	145
6061T6	95	310	276	12	68.9	0.330	96.5	26.0	207

*Number of cycles: 5.0E+8

CORPORATE HEADQUARTERS

Ventec Electronics Co. Ltd.
 308 TaiShan Rd,
 New District Suzhou,
 Jiangsu, P.R. China 215129
 T: +86 512-68091810
 Email: sales@ventec.com.cn

EMEA REGIONAL HEADQUARTERS

Ventec Europe
 Unit 1 Trojan Business Centre,
 Tachbrook Park Estate,
 Leamington-Spa, CV34 6RH, UK
 T: +44 1926-889822
 Email: sales@ventec-europe.com

AMERICAS REGIONAL HEADQUARTERS

Ventec USA
 21 Water Street, Amesbury,
 Massachusetts, MA 01913,
 United States of America
 T: +1 978-5219700
 Email: saleseast@ventec-usa.com

www.ventec laminates.com